
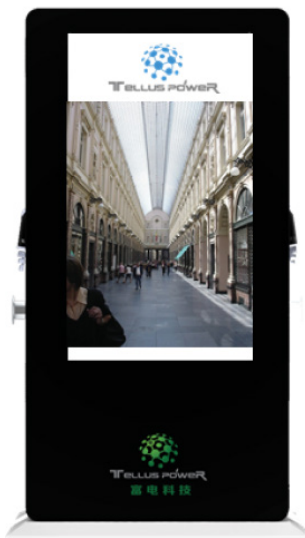


TP-EVVA-380-2B

AC Power Input	380VAC / 480VAC (3P+N+PE), 60Hz
Power Connections	Requires (2) Independent 3x40A branch circuits per port
Required Breaker Panel	Requires (2) 4 pole breaker for each port
Output Current	(2) 3 x 32A Continuous
Power Output	(2) 22 KW Max for each port
Wiring	380VAC / 480VAC – 3 Phase wire, Neutral & Earthing
Charging Connector	Dual Type2 (CCS2 AC) – Level 2
Charging Cable	(2) 18' Charging Cables
LCD Display	(2) 3.5" Back-lit monochrome, non-reflective, heated, UV-coated with ambient light sensor
Network Connectivity	Ethernet
RFID Reader	Active Multi-Standard
Data Inputs/Outputs	RJ45 x 2 (CAT-5 Ethernet Cable)
Construction	Housing: Carbon steel
Color	50Hz ± 1Hz Housing: Light Gray 50Hz ± 1Hz
Enclosure	Carbon Steel. IP 54 Rated
Operating Temperature	4°F to +50°F (-20°C to +55°C)
Operating Humidity	5-95% Non-condensing LCD
Altitude	<9,842' (<3000m)
Safety Certification	GB Listed
Weight	440.92 lbs. (200Kg)
Dimensions	77.16" H x 43.62" W x 16.85" D (1960 x 1108 x 428 mm)

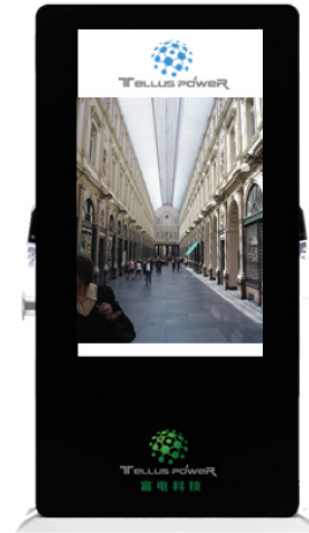

TP-EVTA-220-2M

AC Power Input	380VAC / 480VAC (3P+N+PE), 60Hz
Power Connections	Requires (2) Independent 3x40A branch circuits per port
Required Breaker Panel	Requires (2) 4 pole breaker for each port
Output Current	(2) 32A Continuous
Power Output	(2) 7.2kW Max (220VAC @ 32A) for each port
Wiring	220VAC and shared Earth/Ground, Total 3 wires per port
Charging Connector	SAE J1772TM Level 2
Charging Cable	(2) 18' Charging Cables
LCD Display	(2) 3.5" Back-lit monochrome, non-reflective, heated, UV-coated with ambient light sensor
Network Connectivity	Ethernet
RFID Reader	Active Multi-Standard
Data Inputs/Outputs	RJ45 x 2 (CAT-5 Ethernet Cable)
Construction	Housing: Carbon steel
Color	50Hz ± 1Hz Housing: Light Gray 50Hz ± 1Hz
Enclosure	Carbon Steel. IP 54 Rated
Operating Temperature	4°F to +50°F (-20°C to +55°C)
Operating Humidity	5-95% Non-condensing LCD
Altitude	<9,842' (<3000m)
Safety Certification	GB Listed
Weight	440.92 lbs. (200Kg)
Dimensions	77.16" H x 43.62" W x 16.85" D (1960 x 1108 x 428 mm)

