


## 2 x 7.2KW PEDESTAL AC CHARGER

Type	TP-EVVA-220-2D
Dimension	300 x 1500 x 200 mm
Input Voltage	AC 240V
Rated Power	2 x 7.2 KW
Output Voltage	AC 240V
Output Current	2 x 32A
Weight	50 kg
Working Temperature	-20°C ~ +55°C
Relative Humidity	5% ~ 95%
Altitude	≤ 2000m
Material	Carbon Steel
IP Grade	IP 54
Cable Length	5m / Socket
Frequency	50Hz ± 1Hz
Communication Mode	Ethernet, GPRS, WIFI
Measurement Accuracy	1%
User Interface	LCD
Installation Method	Pedestal
Industry Standard	EN 61851-1:2011, EN 61000-6-1:2007, EN 61000-6-3:2007/A1:2011/AC:2012
Certification	CE



## 2 x 11KW PEDESTAL AC CHARGER

Type	TP-EVVA-380-2C
Dimension	300 x 1500 x 200 mm
Input Voltage	AC 415V
Rated Power	2 x 11 KW
Output Voltage	AC 415V
Output Current	2 x (3 x 16A)
Weight	50 kg
Working Temperature	-20°C ~ +55°C
Relative Humidity	5% ~ 95%
Altitude	≤ 2000m
Material	Carbon Steel
IP Grade	IP 54
Cable Length	5m / Socket
Frequency	50Hz ± 1Hz
Communication Mode	Ethernet, GPRS, WIFI
Measurement Accuracy	1%
User Interface	LCD
Installation Method	Pedestal
Industry Standard	EN 61851-1:2011, EN 61000-6-1:2007, EN 61000-6-3:2007/A1:2011/AC:2012
Certification	CE

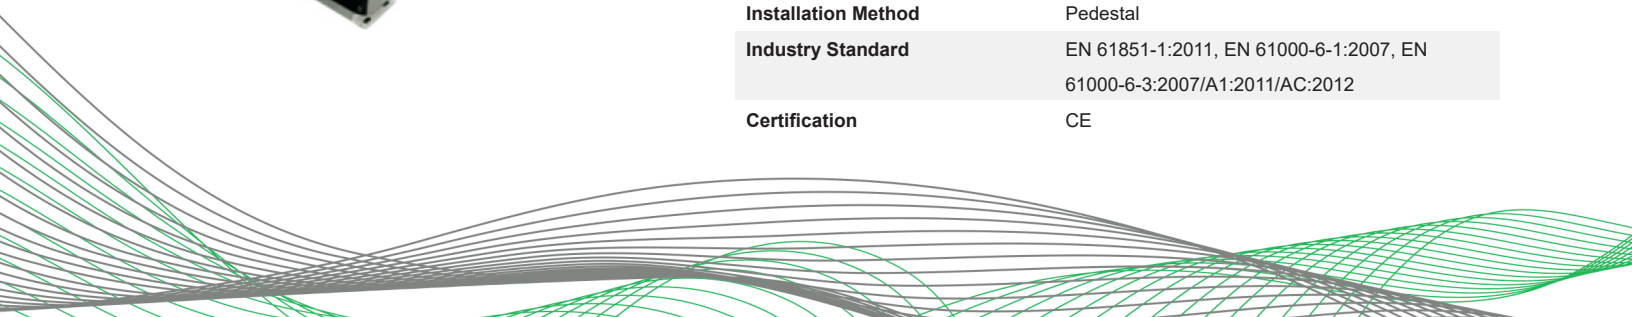

## 2 x 22KW PEDESTAL AC CHARGER

Type	TP-EVVA-380-2C
Dimension	300 x 1500 x 200 mm
Input Voltage	AC 415V
Rated Power	2 x 22 KW
Output Voltage	AC 415V
Output Current	2 x (3 x 32A)
Weight	50 kg
Working Temperature	-20°C ~ +55°C
Relative Humidity	5% ~ 95%
Altitude	≤ 2000m
Material	Carbon Steel
IP Grade	IP 54
Cable Length	5m / Socket
Frequency	50Hz ± 1Hz
Communication Mode	Ethernet, GPRS, WIFI
Measurement Accuracy	1%
User Interface	LCD
Installation Method	Pedestal
Industry Standard	EN 61851-1:2011, EN 61000-6-1:2007, EN 61000-6-3:2007/A1:2011/AC:2012
Certification	CE



## 43KW PEDESTAL AC CHARGER

Type	TP-EVVA-380-1E
Dimension	300 x 1500 x 200 mm
Input Voltage	AC 415V
Rated Power	43 KW
Output Voltage	AC 415V
Output Current	3 x 63 A
Weight	50 kg
Working Temperature	-20°C ~ +55°C
Relative Humidity	5% ~ 95%
Altitude	≤ 2000m
Material	Carbon Steel
IP Grade	IP 54
Cable Length	5m / Socket
Frequency	50Hz ± 1Hz
Communication Mode	Ethernet, GPRS, WIFI
Measurement Accuracy	1%
User Interface	LCD
Installation Method	Pedestal
Industry Standard	EN 61851-1:2011, EN 61000-6-1:2007, EN 61000-6-3:2007/A1:2011/AC:2012
Certification	CE

